




IP67 Terminal Block

CARATTERISTICHE GENERALI

The new terminal block, equipped with eight 3 poles-M8 connectors with signal led, becomes part of the Tpa products in order to ensure good flexibility of use and high standards of protection against water and dust.

It acts as an extension of the TRS terminal blocks, allowing wiring on the machine with IP67 protection level. The 3 poles-M8 connectors allow either the connection of sensors and actuators.

IP67 protection is guaranteed both on the device, that on the cable connected to it.

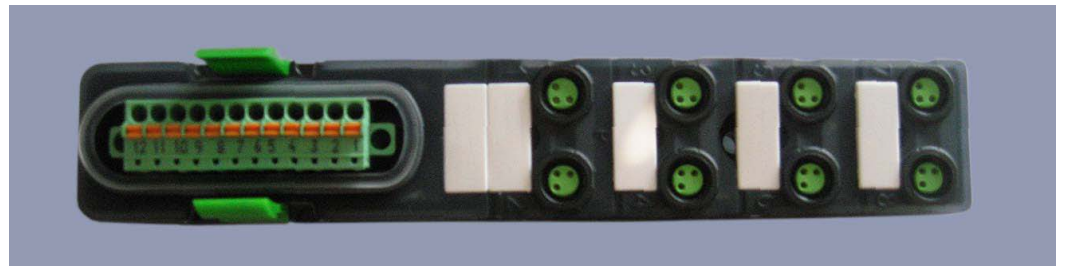

CONTACT LAYOUT

Contact 1	(+)
Contact 3	(-)
Contact 4	(N/O)/(S1)
LED display	LED (green): Power LED (yellow): signal (S1)

TECHNICAL DATA

Operating voltage	24 V DC
Operating current per contact	Max. 2 A
Total current	Max. 8 A
Housing	Plastic, flame retardant
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-20...+70°
Net weight	127 gr

Technical data distribution systems

